

DS-KH6000-E1 Network Indoor Station





The indoor station is designed without screen, satisfying the demands of entry level market and the intercom apartment market, which can provide flexible and convenient intercom functions, customized touch buttons functions, etc., while meeting the needs of customers with limited budgets.

- Cost-effective indoor station without screen
- Standard PoE power supply without additional power adaptor
- Convenient for users to customize functions according to their own usage habits by 4 custom touch buttons



Specification

| System nonemators | |
|--|---|
| System parameters | |
| Operating system | Linux |
| ROM | 8 MB |
| RAM | 64 MB |
| СРИ | Embedded processor |
| Display parameters | |
| Screen size | / |
| Operation method | 9 touch button |
| Туре | 1 |
| Resolution | / |
| Video parameters | |
| Lens | 1 |
| Resolution | / |
| FOV | / |
| WDR | / |
| Video compression standard | / |
| Focal length | / |
| Audio parameters | |
| Audio compression standard | G.711 U, G.711 A |
| Audio input | Built-in omnidirectional microphone |
| Audio output | Built-in loudspeaker |
| Audio compression bitrate | 64 Kbps |
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Capacity | , to justice . |
| Event capacity | / |
| Notice capacity | / |
| Linked indoor extensions | |
| capacity | 16 |
| Network parameters | |
| Communication protocol | TCP/IP, SIP, RTSP |
| Wi-Fi standard | 1 |
| Bluetooth version | 1 |
| 3G/4G standard | / |
| Zigbee | 1 |
| Device interfaces | , , |
| Alarm input | |
| Networksinterface | 1 RJ-45 100 Mbps |
| Jo.555 Dianmo Road, Binjiang District, JAMBEB10051, China | / 110 43 100 Mbp3 |
| 18792461-910051, China 185-485-8807-5998 185-485-8807-5998 | |
| | |
| USB cllow us on social media to get the latest pr | oduct and solution information. |
| TF card Hikvision Hikvision Alarm output | Time 1.4 |



| General | |
|-------------------------|---|
| Button | 9 touch buttons |
| Installation | Wall mounting, table mounting |
| Indicator | 0 |
| Weight | With package: 305.4 g (0.7 lbs) |
| | Without package: 166.6 g (0.4 lbs) |
| Protective level | / |
| Working temperature | -10 °C to 50 °C (14 °F to 122 °F) |
| Working humidity | 10% to 90% |
| Dimensions | 120 mm × 120 mm × 21 mm (4.7" × 4.7" × 0.83") |
| Application environment | Indoor |
| Power consumption | ≤ 4 W |
| Power supply | IEEE802.3af, Standard PoE,12 VDC |
| Language | English |

Available Model

DS-KH6000-E1

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T+86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ












Dimension

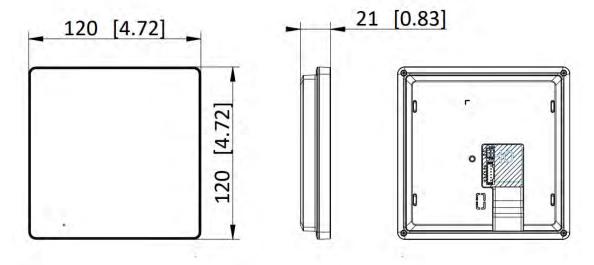

Unit:mm [inch]

SCALE 1:1

- Accessory
- Optional



Headquarters

No.555 Qianmo Road, Binjiang District; Hangzhou 310051, China T+86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ







