

## DS-D4215MI-070H(B) LED Poster Display (Vertical Design)



LED poster display adopts two-color alloy technique. This thin display features magnetic butterfly bezel design and supports seamless splicing of multiple screens. It can be used singly, or horizontally spliced into a display unit with 1080p resolution. It features in dynamic display with high brightness and high contrast. You can get a good display effect from any angle of view. It supports conventional wall-mounting, decorative wall-mounting, pendant mounting, tilt bracket mounting, mobile base mounting, etc.

- Even the thickest part of this thin display is only 28.1 mm or so. With two-color alloy splicing design and magnetic butterfly bezel design, it supports seamless splicing of multiple screens.
- Empowered by self-developed lossless image processing technology and ultra-low gray scale image control technology, it presents dynamic colors and delicate images with soft color.
- You can control and manage your content remotely via local storage, USB flash drive, mobile client, PC client, Hik-cloud, etc.
- Its modular system box supports quick maintenance or replacement of product system modules.
- When used in a single unit, it supports dynamic guidance and mobile phone mirroring. When spliced with two units, it can be used to display character ads. When spliced as a 2K splicing display, it can be directly connected to display a computer screen.
- It supports tilt bracket mounting, mobile two-color alloy base mounting, wall mounting, pendant mounting, and creative bracket mounting.
- HOB light board protection functions make it moisture-proof in humid regions and prevent it from falling over in crowded places.

## ▪ Specification

Model		DS-D4215MI-070H(B)
<b>Product Model</b>	Product Model	DS-D4215MI-070(B)
<b>Cabinet</b>	Pixel Configuration	SMD Triad LED
	Pixel Pitch Category	P1.5
	Pixel Pitch	1.5625 mm
	Modules Component	Cabinet × 5, single cabinet (2 × 4)
	Dimensions (W × H × D)	613 × 1695.5 × 68.1 mm (24.1 × 66.8 × 2.7 inch)
	Resolution	384 × 1080
	Area	1.0125 m <sup>2</sup>
	Weight	29 kg (64.0 lb.)
	Pixel Density	409600 dots/m <sup>2</sup>
	Lamp Board Housing	Without housing, glue potting
	Cabinet Material	Aluminum alloy
	Maintenance Method	Front maintenance for cabinet, and rear maintenance for system backpack
<b>Display</b>	White Balance Brightness	600 cd/m <sup>2</sup>
	Color Temperature	3000 to 10000 K adjustable
	Viewing Angle	Horizontal 160°, vertical 160°
	Contrast Ratio	≥ 3000:1
	Color Uniformity	± 0.003 Cx, Cy
	Brightness Uniformity	≥ 97%
<b>Processing Performance</b>	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	Up to 3840 Hz
	Grey Level	Up to 16 bit
<b>Power</b>	Power Supply	110 to 220 VAC ± 15%
	Max. Consumption	≤ 450 W/m <sup>2</sup>
	Average Consumption	< 150 W/m <sup>2</sup>
<b>Working Environment</b>	Working Temperature	-10 to 40 °C (14 to 104 °F)
	Working Humidity	10% to 60% RH (non-condensing)
	Storage Humidity	10% to 85% RH (non-condensing)
	Storage Temperature	-20 to 60 °C (-4 to 140 °F)
<b>General</b>	Package Dimension (W × H × D)	1831 × 1082 × 246 mm (72.1 × 42.6 × 9.7 inch)
	Gross Weight	35 kg (77.2 lb.)
	Packing List	Power cord × 1, HDMI × 1, Wi-Fi antenna × 2

▪ Typical Application



均支持快速组合为1080P 标准分辨率

Both support fast combination to 1080P standard resolution



一体化整机设计 可用于展厅陈列展示或异形拼接

Integrated whole machine design, can be used for exhibition hall display display or irregular stitching



局域网/专网环境下 多点位集中控制管理  
LAN/private network environment, multi-point centralized control and management.



连锁门店广告展示相较于液晶显示器 无缝高亮展示  
Chain store advertising display, compared to LCD display, seamless high brightness display




与传统商场活动展陈相比 无需复杂组装  
Compared with traditional shopping mall activities, there is no need for complex assembly

▪ Available Model

DS-D4215MI-070H(B)

▪ Dimension

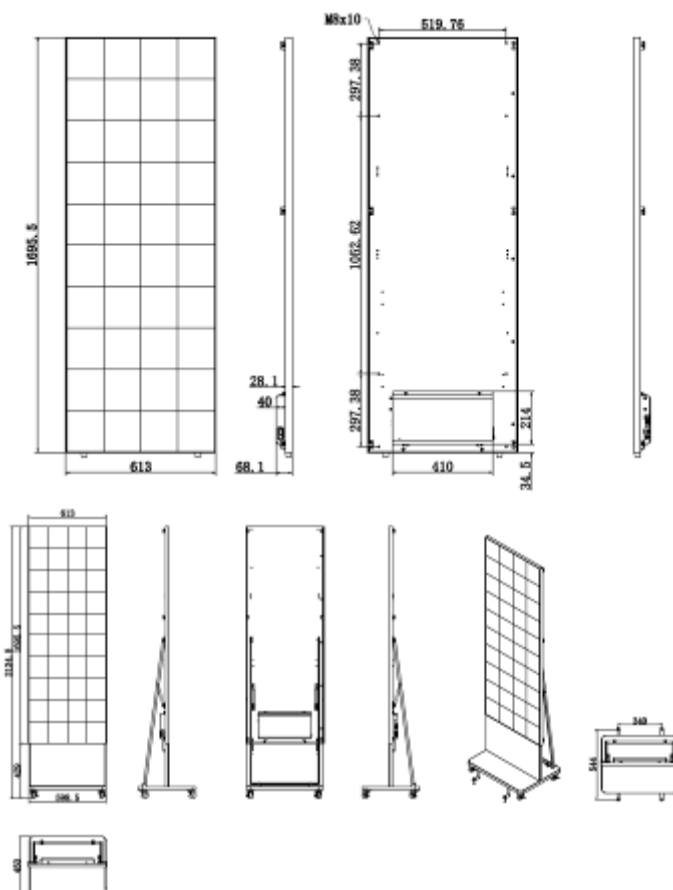

Unit: mm

▪ **Accessory**

▪ **Included**

**LED Poster Display—Tilt  
Bracket**



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8907-5000  
www.hikvision.com



Follow us on social media to get the latest product and solution information:



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq