

## DS-6910UDI(B) Decoder



- Provides HDMI (adaptable to DVI-D) and BNC output interfaces.
- Up to 4K (3840 × 2160@30Hz) via HDMI output interfaces (only for odd interface).
- H.265+/H.265, H.264+/H.264, Hik264, MPEG4 and MJPEG video compression.
- PS, RTP, TS, ES, HIK encapsulation formats.
- Three encoding levels: baseline, main, and high-profile.
- G.722, G711A, G726, G711U, MPEG2-L2, and AAC audio compression.
- Two decoding modes: active decoding and passive decoding.
- Remote video files' decoding output.
- Supports two-way audio via client software.
- Provides VGA and DVI input interfaces.
- Supports window opening, window roaming and window split.
- Supports multi-screen control with PC installed with RSC server.
- Gets stream and decodes via URL and RTSP from encoding devices.
- Displays the decoded video stream on the video wall by directly linking cameras or by stream media forwarding.
- You can configure what the video wall shows when decoding ends and streaming fails via the Web browser and client software.
- Configurable LED width and height parameters when the LED is connected.
- Regular and irregular virtual screen configurable to display multiple signal sources and get rid of the restriction of physical screen.
- Accessible by 2.4 MP DeepinView camera.
- Accessible by thermal network camera and you can view the temperature measurement, dynamic fire source detection, ship detection and VCA information in live view and playback.
- You can enable or disable the smart information for the thermal network camera.
- Two-way audio.
- Port aggregation technology (Ethernet Channel).



## ▪ Specification

Model		DS-6910UDI(B)
Input/Output	Input	VGA, DVI-I
	Input Resolution	VGA, DVI-I: 1080p: 1920 × 1080@50/60 Hz, 720p: 1280 × 720@50 Hz/60 Hz
	Output	HDMI × 10, BNC × 5 (DB15 × 2)
	Output Resolution	HDMI: 4K: 3840 × 2160@30 Hz ( for odd interface only) 1080p: 1920 × 1080@50/60 Hz 720p: 1280 × 720@50 Hz/60 Hz BNC: PAL: 704 × 576, NTSC: 704 × 480
Decoding	Decoding Resolution	Up to 24MP (only for 3 encoder tracks mode)
	Decoding Channel	80-ch
	Decoding Capability	24MP@30fps: 5-ch, 12MP@20fps: 10-ch, 8MP@30fps: 20-ch, 5MP@30fps: 30-ch, 3MP@30fps: 50-ch, 1080p@30fps: 80-ch
	Split Screen	1/4/6/8/9/12/16/25/36
Interface	Network Interface	RJ45 interface × 2, 10/100/1000 Mbps adaptive Optic interface × 2, 100 base-FX/1000 base-X An RJ45 interface and an optic interface form a combo.
	Serial Interface	RS-232 (RJ45) × 1, RS-485 × 1
	Audio Output	10 (DB15 × 2)
	Two-way Audio In	1 (3.5 mm connector, 2.0 Vp-p, 1 KΩ)
	Two-way Audio Out	1 (3.5 mm connector, 2.0 Vp-p, 1 KΩ)
	Alarm In	8
	Alarm Out	8
General	Power Supply	100 to 240 VAC
	Power Consumption	≤ 108 W
	Dimensions(W × D × H)	440 mm × 321 mm × 88 mm (17.32 inch × 12.64 inch × 3.46 inch)
	Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Working Humidity	10% to 90%
	Weight	≤ 6.4 kg (14.11 lb)

## ▪ Available Model




DS-6910UDI(B)

## Physical Interface




Front Panel	Description	Rear Panel	Description
VGA IN	VGA input signal indicator	AUDIO OUT	Audio output interface
DVI IN	DVI input signal indicator	VIDEO OUT	Video output interface
POWER	Power indicator	HDMI OUT	HDMI video output interface
G2	10/100/1000 Mbps Ethernet interface 2	VGA VIDEO IN	VGA video input interface
OPT2	10/100/1000 Mbps optical interface 2	DVI VIDEO IN	DVI video input interface
USB	USB 2.0 interface	LINE IN/OUT	Line input/output interface
G1	10/100/1000 Mbps Ethernet interface 1	RS-485	RS-485 interface
OPT1	10/100/1000 Mbps optical interface 1	ALARM IN	Alarm in interface
RS-232	RS-232 interface	ALARM OUT	Alarm out interface

## Dimension

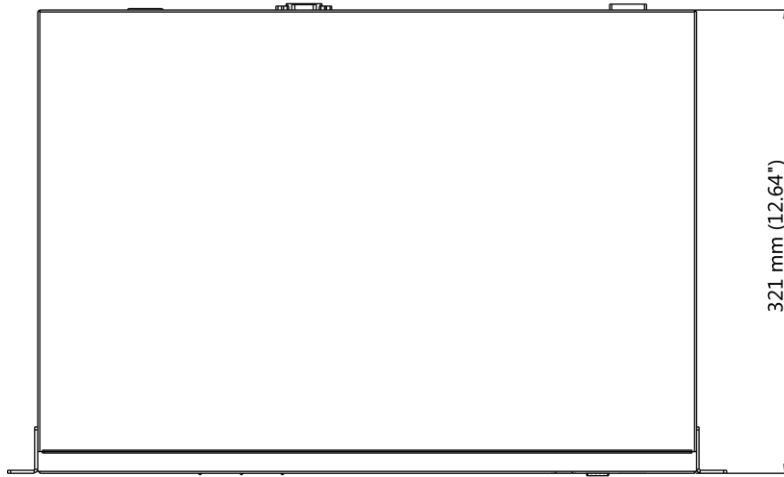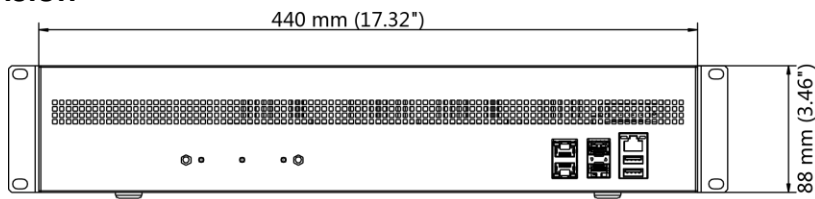

Distributed by

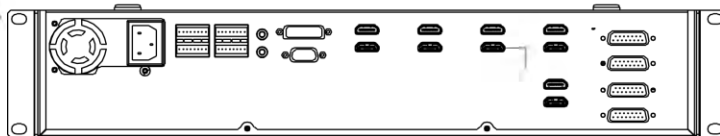

# HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com