

DS-7108HQHI-K1+4+4CAM 2MP TURBO HD KIT

Key Feature

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- Full channel recording at up to 4 MP lite resolution
- Full channel synchronous real-time playback
- Hik-Connect app for easy network management



Camera

- 2MP high-performance CMOS
- smart IR, up to 20 m IR distance
- 1 Analog HD video output
- IP66

DVR

- Connectable to HDTV/HD/CVI/CVBS/IP video signal
- Up to 12-ch IP camera input (up to 6 MP)
- H.265 Pro+ encoding improves encoding efficiency and reduces data storage costs
- Simultaneous HDMI/VGA output at up to 1920 × 1080 resolution
- One SATA interface (up to 6 TB capacity per HDD)





Specifications

Kit model		DS-7108HQHI-K1+4+4CAM
DVR		DS-7108HQHI-K1
Video/ Audio input	IP video input	4-ch (up to 12-ch)
		Up to 6 MP resolution
		H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
	Analog video input	8-ch
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
	Video input	HDTVI, AHD, CVI, CVBS, IP
	Audio compression	G.711u
	Audio input/Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)
	Encoding resolution	When 1080p Lite mode is not enabled: 4 MP lite/3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode is enabled: 4 MP lite/3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF
	Frame rate	Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps(P)/30fps(N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps(P)/30fps(N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps(P)/30fps(N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps(P)/30fps(N)
Sub-stream: WD1/4CIF@12fps; CIF@25fps(P)/30fps(N)		
Hard disk	SATA	1 SATA interface
	Capacity	Up to 6 TB capacity for each disk

External interface	HDMI/VGA output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz HDMI and VGA simultaneous output	
	Network interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface	
	USB interface	Rear panel: 2 × USB 2.0	
General	Operating condition	-10 °C to 55 °C (14 °F to 131 °F), Humidity: 10% to 90%	
	Dimensions (W × D × H)	200 × 200 × 45 mm (7.9 × 7.9 × 1.8 inch)	
	Weight (without HDD)	≤ 1 kg (2.2 lb)	
Camera	DS-2CE16D0T-IRP	DS-2CE56D0T-IRP	
Image sensor	2 MP CMOS image sensor		
Lens	82.2°, 3.6 mm		
IR range	Up to 20 m		
Power consumption	Max. 4 W		
Protection level	IP66	N/A	
Operating conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)		
Dimensions (W × D × H)	Φ70 × 154 mm (Φ2.76 × 6.069 inch)	Φ89.5 × 69.8 mm(Φ3.52 × 2.75 inch)	
Weight	300 g (0.66 lb)	250 g (0.55 lb)	
Kit	DS-7108HQHI-K1+4+4CAM		
DVR	1 × DS-7108HQHI-K1		
Camera	4 × DS-2CE16D0T-IRP		
	4 × DS-2CE56D0T-IRP		
Accessories	Power	1 × power cable, 1 × power adaptor, 1 × power transfer cable	
	Cable	8 × 18 m (59 ft) video cable	
Weight	≤ 6.1 kg (13.4 lb)		

Camera Dimension



For DS-2CE16D0T-IRP

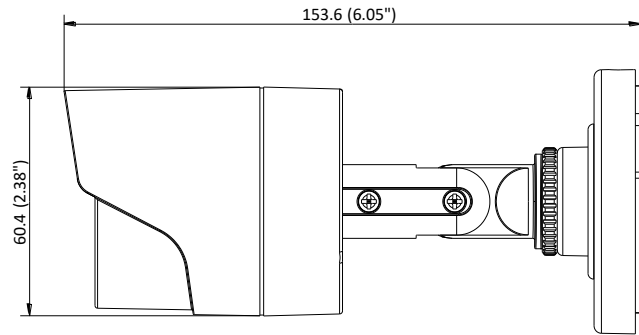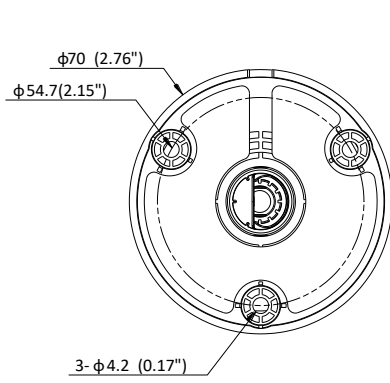

For DS-2CE56D0T-IRP


unit: mm

For DS-2CE56D0T-IRP

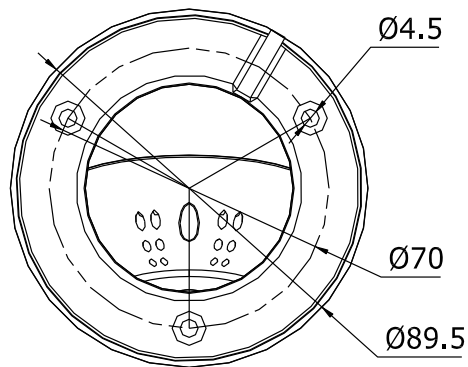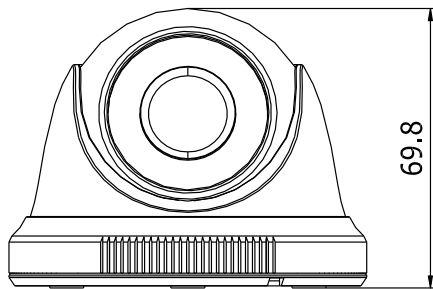

Unit: mm

DVR Physical Interface

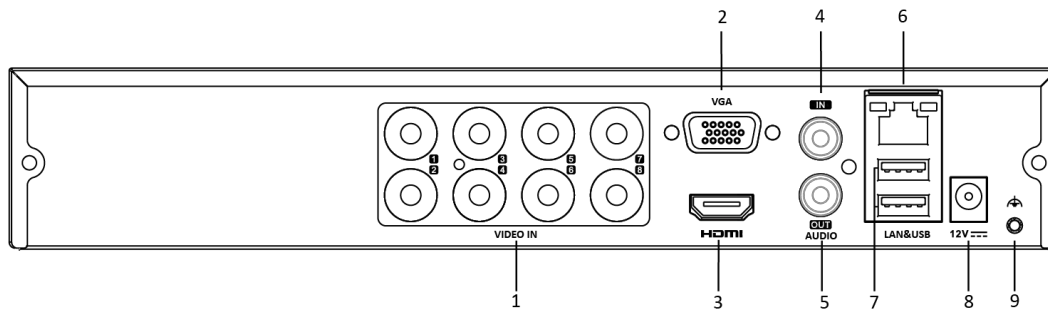

Index	Description	Index	Description
1	VIDEO IN	6	Network Interface
2	VGA	7	USB Interface
3	HDMI	8	Power Supply
4	AUDIO IN	9	GND
5	AUDIO OUT		

Available Model

DS-7108HQHI-K1+4+4CAM

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-869-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com