

60 SERIES IP CAMERAS

Take Advantage of Honeywell's 60 Series IP Cameras



Honeywell is taking quality and reliability to the next level with the 60 Series IP cameras suited for a wide range of indoor or outdoor applications. Choose from 4MP or 5MP dome or bullet cameras or a 2MP speed dome (PTZ) model. All models offer exceptional picture clarity, flexible system integration, secure data transmission and easy installation.

SUPERIOR HD IMAGE QUALITY, UP TO 5MP

- Up to 5MP (2560x1920) cameras
- True WDR (>120 dB) ensures glare-free images
- True day/night provides vivid color images by day and clear black and white images at night using a removable IR cut filter
- Excellent low-light performance with 2D/3D noise reduction saving storage and bandwidth together with smart codec ⁽²⁾
- For use as part of Video Systems which comply with NDAA Section 889

FLEXIBLE SURVEILLANCE SOLUTION

- A wide range of lenses and zoom options for all types of installations
- H.265⁽¹⁾, H.264, Smart Codec ⁽²⁾ and MJPEG supported with triple streaming
- Adaptive smart IR Technology provides even distribution of IR LEDs in dimly lit or nighttime scenes
- Water/Dust proof (IP 66/67) and IK10 and NEMA 4X (outdoor dome, bullet and speed dome)
- ONVIF Profile S and G compliant
- FIPS 140-2 Certified chipset built-in for the stream encryption and SD card encryption under AES 256 to provide the secure data integrity and privacy
- Built-in video analytics ⁽⁴⁾ to reduce the false alarms in perimeter protection, including Intrusion Detection, Loitering Detection, Line Crossing Detection, Unattended Object Detection, Missing Object Detection and Face Detection

EASY TO INSTALL AND USE


- Built-in PoE eliminates separate power supply and associated wiring; 24VAC/24VDC/12VDC inputs where PoE power is unavailable
- Camera configuration via Wi-Fi ⁽³⁾ (Mobile Device), WebClient or NVR to adjust Zoom, Auto Focus, etc.
- Multiple mounting options to support a wide range of security applications
- Multiple language GUI ⁽³⁾ (9 countries)
- Unified camera configuration tool for the batch configuration

ONBOARD VIDEO STORAGE

- Supports microSD (Class 10) card up to 256GB for encrypted local video storage (card not included)

MARKET OPPORTUNITIES

These fully featured attractive cameras are perfect for various types of security installations, from complete area coverage with speed dome cameras to high resolution True Day/Night cameras for any scenario. The 60 Series provides excellent picture clarity at minimal bandwidth whilst offering maximum protection against dust and water. Boasting modern designs and offering up to 5MP high definition images, these cameras are suited for a wide range of security applications.

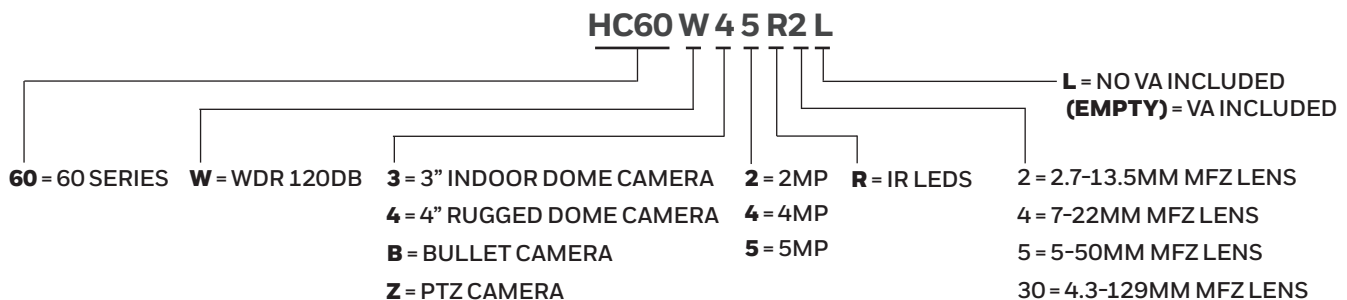

(1): Covered by one or more claims of the patents listed at patentlist.hevcadvance.com.

(2): Smart Codec saves up to 50 percent on bandwidth and storage compared to standard H.264/H.265 (Scene Dependant)

(3): Supplied with English, German, Spanish, French, Italian, Japanese, Portuguese, Russian and Traditional Chinese packages, support the customizable language string edit.

(4): Not available on HC60W34R2L, HC60W44R2L and HC60WB4R2L

Honeywell

60 SERIES IP CAMERAS

ORDERING

| | |
|------------|---|
| HC60W34R2 | 4MP Network IR Indoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE, H.265 HEVC Smart Codec, IP52, Built-in Microphone, White |
| HC60W34R2L | 4MP Network IR Indoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE, H.265 HEVC Smart Codec, IP52, Built-in Microphone, White, No VA Licence |
| HC60W35R2 | 5MP Network IR Indoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE, H.265 HEVC Smart Codec, IP52, Built-in Microphone, White |
| HC60W35R4 | 5MP Network IR Indoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 7-22mm MFZ, 4 IR LEDs, PoE, H.265 HEVC Smart Codec, IP52, Built-in Microphone, White |
| HC60W44R2 | 4MP Network IR Outdoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, White |
| HC60W44R2L | 4MP Network IR Outdoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, White, No VA Licence |
| HC60W45R2 | 5MP Network IR Outdoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, White |
| HC60W45R4 | 5MP Network IR Outdoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 7-22 mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, White |
| HC60WB4R2 | 4MP Network IR Outdoor Bullet Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10, White and Grey |
| HC60WB4R2L | 4MP Network IR Outdoor Bullet Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, Grey, No VA Licence |
| HC60WB5R2 | 5MP Network IR Outdoor Bullet Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, Grey |
| HC60WB5R5 | 5MP Network IR Outdoor Bullet Camera, WDR 120 dB, 1/2.8" CMOS, 5-50mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, Grey |
| HC60WZ2E30 | 2MP Network PTZ Outdoor Dome, WDR 120 dB, 1/2.8" CMOS, 30X Optical Zoom, TDN, H.265 HEVC Smart Codec, UPoE, 24VAC/DC, IP68/IK10/NEMA4X, White |

| MODEL | DESCRIPTION | MODEL | DESCRIPTION |
|-----------|--|----------|---|
| HA60BB1 | Junction box, 60 series outdoor bullet | HA60WIF | Wi-fi dongle and USB adapter for camera configuration |
| HA60JCBH1 | Dome junction box | HA60BFP | Replacement bullet camera front panel - 60 Series |
| HA60PCMZ | Pendant Mount Bracket, 1.5 NPT | HA60POEZ | UPOE Injector for 60 Series PTZ |
| HA60PLMZ | PTZ Pole mount bracket, white | HA60CB3 | Replacement Dome, 60 series indoor bubble (Clear) |
| HA60CNMZ | PTZ Corner mount bracket, white | HA60CB4 | Replacement Dome, 60 series outdoor bubble (Clear) |
| HA60ICMZ | PTZ In ceiling mount bracket , white | HA60CB6 | Replacement Dome, 60 series speed dome bubble (Clear) |
| HA60WLMZ | PTZ Wall mount bracket, 1.5 NPT, white | HA60SB3 | Replacement Dome, 60 series indoor bubble (Smoke) |
| HA60WLM3 | Wall mount bracket for 3 inch dome, white | HA60SB4 | Replacement Dome, 60 series outdoor bubble (Smoke) |
| HA60WLM4 | Wall mount bracket for 4 inch dome, white | HA60SB6 | Replacement Dome, 60 series speed dome bubble (Smoke) |
| HA60PMC3 | Flush mount adaptor for 3 inch dome ,black | HA60ICK | Indoor dome in-ceiling mount kit |
| HA60PMC4 | Mount adapter, 1.5NPT (out), 3/4NPT (in) | HA60APR | Outdoor dome adapter plate and rubber |

For more information

www.security.honeywell.com/uk
www.security.honeywell.com/me

Honeywell Commercial Security

Emaar Business Park, Sheikh Zayed Road
 Building No. 2, 2nd floor, 201
 Post Office Box 232362
 Dubai, United Arab Emirates
 Tel: +971 4 450 5800



Building 5 Carlton Park
 King Edward Avenue
 Narborough, Leicester
 LE19 0AL
 Tel: +44 (0)1163 500714
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
 HEVC and the HEVC logo are trademarks of HEVC Advance.
 Honeywell reserves the right, without notification, to
 make changes in product design or specifications.

HSV-60SERIESQRG-05-UK(0222)DS-ZD
 © 2022 Honeywell International Inc.

Honeywell