

DS-3E2510P(B) Gigabit Ethernet switch

DS-3E2510P(B) switch is a new generation of intelligent access switch launched by our company for operator local network and enterprise network. Based on the new generation of high-performance hardware and software platform with independent intellectual property rights, ds-3e2510p (b) supports powerful ACL, QinQ, QoS and other functions, and supports three-tier routing. Its simple and rich management mode and flexible installation mode enable the product to meet the access requirements of various complex scenarios.



Feature and Function

- 8 Gigabit Poe electrical ports and 2 Gigabit / 100M SFP optical ports
- Support static routing, policy routing, rip, OSPF and other three-layer routing protocols
- IGMP snooping and GRMP for filtering multicast traffic.
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning.
- Support IEEE 802.1x authentication, radius and bdtacacs + authentication
- Support EAPs and ERPs Ethernet ring network protection protocol
- QoS (IEEE 802.1P/1Q and TOS/DiffServ) to increase determinism.
- Support IEEE 802.3af/at compliant PoE.
- Each PoE port provides up to 30W output power.
- PoE management: PoE device detection, PoE power management
- Easy network management by web browser, Console, Telnet, SSH.
- SNMPv1/v2c/v3 for different levels of network management.

Specification

Model		DS-3E2510P(B)
Network Parameters	Port Number	8 Gigabit Poe electrical ports and 2 Gigabit SFP optical ports
	Forwarding Mode	Store-and-forward switching
	MAC Address Table	8 K
	Switching Capacity	336 Gbps
	Packet Forwarding Rate	28 Mpps
PoE Power Supply	PoE Standard	IEEE 802.3af, IEEE 802.3at
	PoE Power Pin	Mid-span: 1/2(-), 3/6(+)




	PoE Port	Ports 1 to 8
	Max. Port Power	30 W
	PoE Power Budget	130 W
Software Function	Device Maintenance	Support Console, Telnet, SSH Support web, http,https Support FTP, TFTP, Xmodem, SFTP Support SNMP V1/V2c/V3 Support RMON Support NTP
	Reliability	Support STP/RSTP/MSTP Support EAPS/MEAPS Support MRD-Ring Support ERPS Support VRRP Support BFD for OSPF Support BFD for OSPF
	VLAN	Support IEEE 802.1Q (VLAN), 4096 VLAN IDs Support GVRP Support QinQ Support VLAN based on MAC/ protocol /IP subnet / policy / port Support Private VLAN Support 1:1 and N:1 VLAN Mapping functions
	Port Mirroring	Support local and remote port mirroring Support N:4 port mirroring Support flow mirroring Support MAC mirroring
	Routing	Support Static routing, RIP, OSPF Support IPv4/IPv6 ECMP Support VRRP, VRRP v3 Support IPv4/IPv6 Policy-based routing Support IPv4/IPv6 Routing policy Support IPv4/IPv6 dual stack Support IPv6 static routing, RIPng, OSPFv3
	QoS	Support Diff-Serv QoS Support 802.1p/DSCP priority mapping Support Queue scheduling including SP, WRR, WFQ, SP+WRR, SP+WFQ Support Priority marking and remarking Support Traffic shaping Support Congestion avoidance, Tail-Drop and WRED Support 802.1p, TOS, DSCP, and EXP priority mapping Support Port/Flow- based Rate Limiting
	Multicast	Support IGMP v1/v2/v3 Snooping Support IGMP V1/V2/V3 Support MLD Snooping v1/v2 Support MLD v1/v2
	ACL	Support IP-based ACL/MAC-based ACL Support based on MAC Address, IP Address, Ethertype, Protocol Type, VLAN ID, DSCP, 802.1p Priority Support up to 256 ACLs
	Link Aggregation	Support IEEE 802.3ad LACP/static link aggregation


Security	<p>Support AAA,TACACS+ Radius Authentication</p> <p>Support 802.1X authentication, MAC authentication, MAC bypass authentication</p> <p>Support to prevent DOS, ARP attack function, ICMP anti attack</p> <p>Support binding of IP, MAC, port and VLAN</p> <p>Support MAC authentication</p> <p>Support MAC address filtering</p> <p>Support Broadcast/Multicast/Unknown-unicast Storm Control</p>
Shell	Iron shell, fanless design
weight	1.2 kg (2.65 lb)
Dimension (W × H × D)	280 mm × 44 mm × 180 mm
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Storage Temperature	-40°C to 75°C (-40°F to 167°F)
Operating Humidity	10% to 90% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	AC: 100V–240V, 50/60Hz
Max. Power Consumption	140 W
Power Consumption in Idle	10 W

Physical Interface

Front panel:

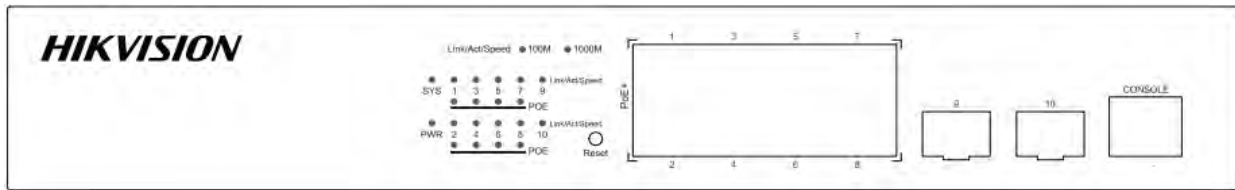

Back panel:

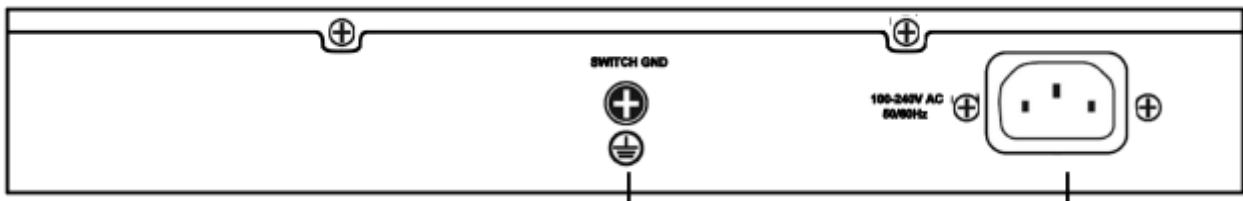


Available Model



DS-3E2510P(B)

Model	Specifications
DS-3E2510P(B)	8-port Gigabit power + 2-port gigabit optical, quasi three-layer Ethernet Poe switch (1 Console port, 8 Gigabit Poe ports, 2 gigabit optical ports, standard power supply AC220V, Poe power 130W, fanless mute design, 1U height, desktop installation / 19 inch rack installation)


Dimension (Unit: mm)

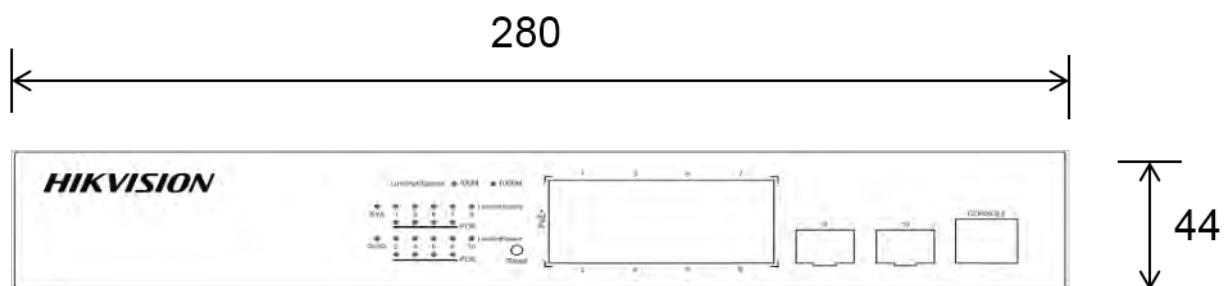


280

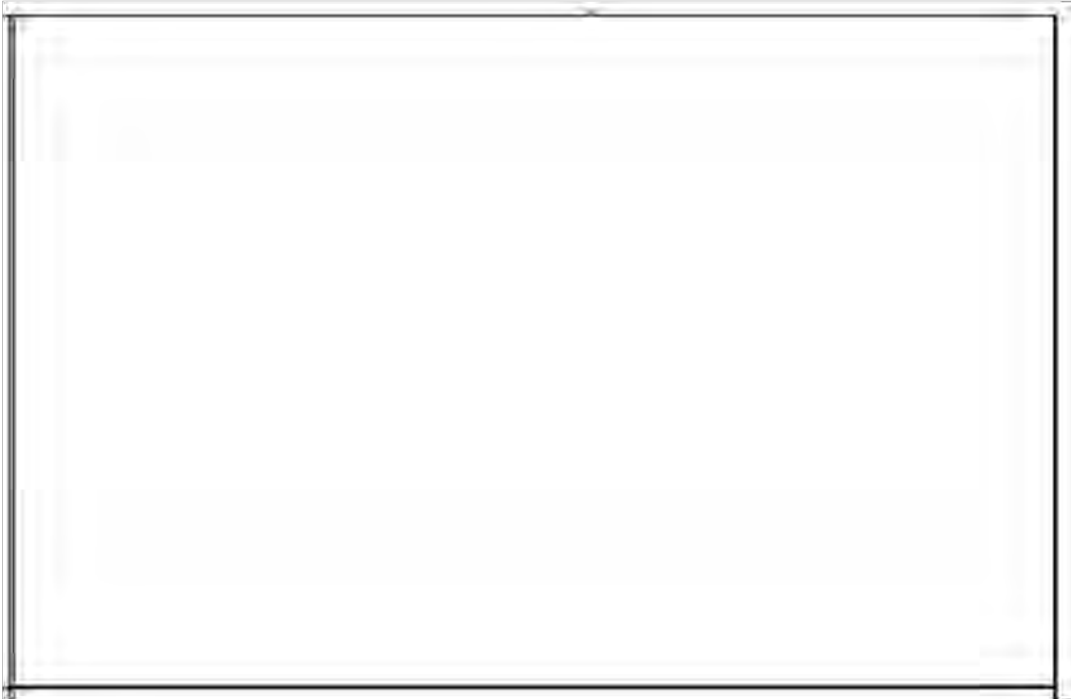

180



Typical Application

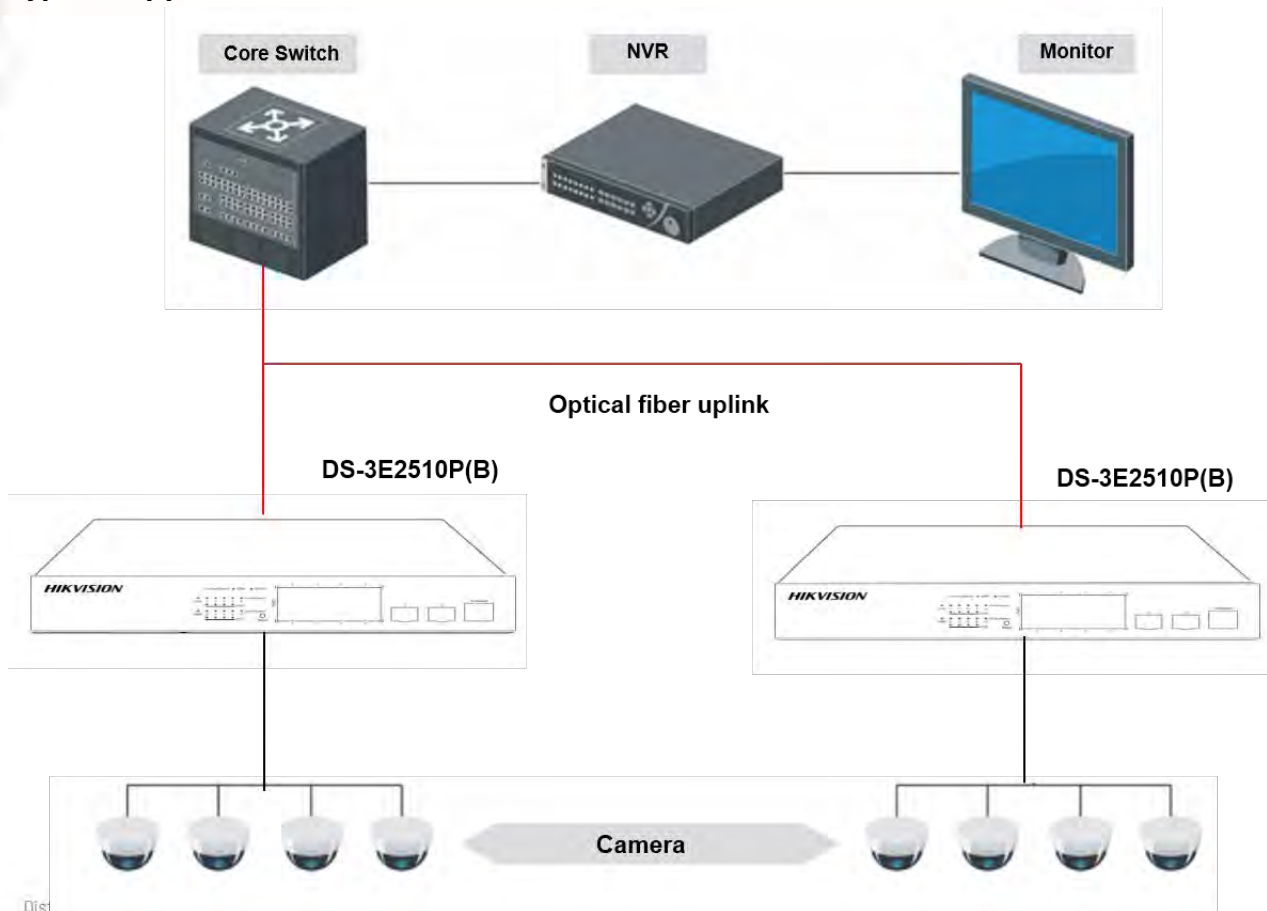

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8589-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6680
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
Info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
Info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
Info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com